

APPLICATION

A decorative cylinder for surface, wall or pendant mount to compliment recessed downlights of the same aperture and performance.

PRODUCT DATA

REFLECTOR: Heavy gauge hydroformed aluminum reflector with Alzak finish and self trimming flange with **fresnel** or **prismatic** lens. Available in a wide range of finishes.

HOUSING: The cylindrical housing is heavy gauge aluminum and finished to an architectural grade. The standard exterior finish is matte white, powder coat paint. The cylinder can be surface mounted, wall mounted or suspended by pendant.

ELECTRICAL: 120 to 277 volt input 50 to 60 Hz electronic ballasts are instant start, under 10% THD. Optional Emergency Battery pack for 90 minute single lamp operation. ETL/CETL Damp Location Listed.

SOCKET: Positive latch 4 pin thermoplastic.

LAMP DATA:	LAMP	WATTS	BASE	BALLAST	LUMENS
Standard lamping, initial lumens.	Quad Tube 4-Pin	13	G24q-1	Elec.	900
		18	G24q-2	Elec.	1250
		26	G24q-3	Elec.	1800
	Triple Tube 4-Pin	26	G24q-3	Elec.	1800
		32	G24q-3	Elec.	2400
		42	G24q-4	Elec.	3200


MOUNTING: (Specify when ordering.)

Ceiling (Surface) Mount – Provided with mounting holes for securement to 4" octagon junction box.

Wall Mount – Standard bracket protrudes 4.5" from wall (specify others) mounts to 4" octagon junction box.

Pendant Mount – Swivel mount canopy allows cylinder to hang plumb up to 30° sloped ceiling stem 3/8" IPS (specify length) canopy adds 1.5" to overall length. Standard finish white powder coat. Specify Pendant Kit as follows:

EXAMPLE: PK 24 W

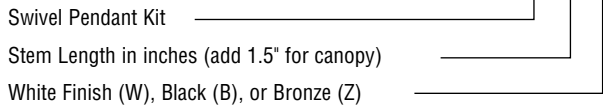


Cable Mount – Supplied with 10' field adjustable aviation cable and either straight or coiled cord. Ceiling canopy to match finish on cylinder housing.



SERIES C2SHF Enclosed

8" Aperture 10" x 12" Cylinder – Lensed Reflector

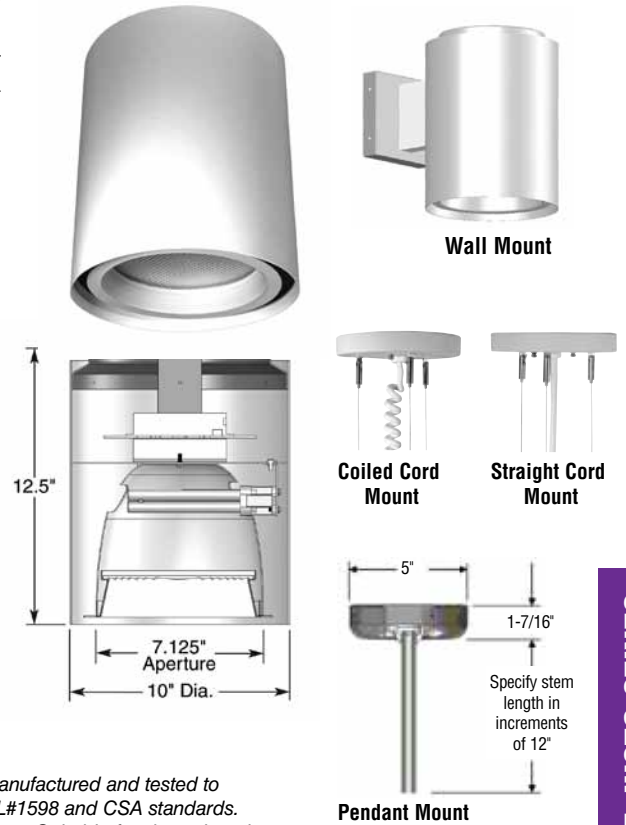

Manufactured and tested to UL#1598 and CSA standards. Note: Suitable for damp location.

Catalog #:

C2 [] [] [] [] / HFL81 [] [] [] [] / PK12
 Example: C2SHF132TE4 / Example: HFL81SCL / PK12W

Fixture Series	No. of Lamps	Wattage/Lamp	Ballast / Voltage*	Reflector	Reflector Finish
Surface – C2SHF	1 or 2	13 Quad	E4 120/277 V Electronic D Dimming Ballast TL Twist Lock Socket (26&32 Watt Only) * Refer to separate page for dimming ballast specifications and availability of other styles	Reflector with Fresnel Lens & Splay HFL81 – Quad Tube, Two Lamp HFL813 – Triple Tube, Two Lamp HFL814 – Quad or Triple Tube, One Lamp SCLPF – Soft Specular Clear "Alzak" with Polished Flange WHT – Reflective White Painted Finish	Reflector with Prismatic Lens & Splay HPL81 – Quad Tube, Two Lamp HPL813 – Triple Tube, Two Lamp HPL814 – Quad or Triple Tube, One Lamp SCLPF – Soft Specular Clear "Alzak" with Polished Flange WHT – Reflective White Painted Finish For other finishes, consult reflector section.
Pendant – C2PHF		18 Quad			
Wall – C2WHF		26 Quad			
Cable – C2A * HF		26T Triple			
	1	32T Triple	42T Triple		

* A1 = Straight White Cord, A2 = Straight Black Cord, A3 = Coiled White Cord, A4 = Coiled Black Cord

Optional Finishes

Suffix #

- Black Cylinder Housing – B
- Bronze Cylinder Housing – Z
- Galvanite..... – GAL
- Satin Aluminum – SA
- Metallic Aluminum..... – MA

Options

- EM = Emergency Power Pack with Internal Test Switch
- F = Fused

Fixture:	Type:
Project:	

All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice. Alzak® is a registered trademark of Alcoa.



Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591
 voice 800.342.0592 • fax 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

SERIES C2SHF Enclosed – 8" Aperture - 10" x 12" Cylinder – Lensed Reflector

SF7.0
CBMDUM