

## APPLICATION

Light-Squares™ recessed downlights are ideal for low to medium height ceilings where an architecturally pleasing square aperture is desired. Adjustable AR111 halogen downlight is ideal for areas where good color rendition is necessary.

## PRODUCT DATA

**REFLECTOR:** Rotation ring allows for 359° horizontal and 45° adjustment of lamp. A dual locking mechanism insures that the fixture stays aimed during relamping. Heavy gauge spring clips maintain a tight fit to ceiling to eliminate light leaks and facilitate easy installation. A one half inch low profile, polished overlap flange is standard. Die formed flange cover eliminates appearance of mitered corners. Available in a variety of matte Alzak® finishes as well as a textured corrugated style (CRG).

**HOUSING:** A fabricated 18 gauge matte black steel housing provides a secure mounting platform for the electrical components and protects the optical assembly. Top cover is removable for top relamping. Standard plaster flange allows one inch ceiling thickness. Custom depths are available by contacting our sales department. Low voltage transformer is accessible from below.

**MOUNTING:** Universal mounting brackets adjust vertically 5.5" and accept a variety of hanger bars, C-Channel, EMT or rigid bars (see optional accessories).

**ELECTRICAL:** An electronic low voltage transformer is internally mounted and accessible from below. Transformer has a maximum full load rating of 75 watts\* and 12 volts AC, with internal circuit breaker. ETL/CETL damp location listed for eight wire 90°C branch wiring.

**JUNCTION BOX:** Heavy gauge galvanized junction box pre-wired with grounding pigtail. Easy access covers. Multiple conduit knockouts listed for through branch circuit wiring.


**LAMP DATA:** 12 Volt AR111 halogen, 100 watts maximum\*. High temperature porcelain socket. For lamp performance data consult lamp manufacturer's catalog.

*Coventry*  
Architectural Series

## SERIES 6SQAAR111

Square Aperture Adjustable AR111 Accent Downlight

LIGHT-SQUARES™

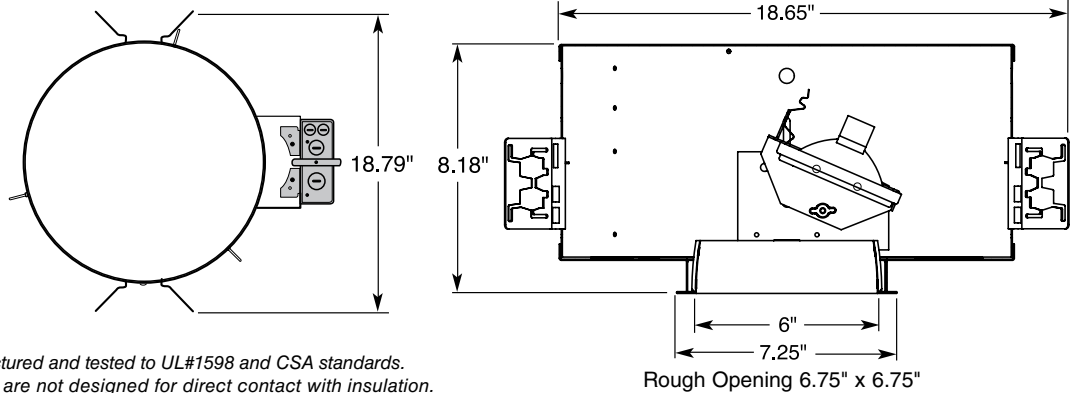

FOR WET LOCATION  
UNDER COVERED CEILING

Manufactured and tested to UL#1598 and CSA standards.  
Fixtures are not designed for direct contact with insulation.

Catalog #:

6SQA

Example: 6SQAAR111E1

6SQA

Example: 6SQHAZPF

Fixture Series	Lamp/Wattage	Ballast/Voltage	Options
6SQA	AR111	E1 / Electronic 120V E2 / Electronic 277V* *75W Max. Load	See Options Below

Trim	Trim Finish w/polished flange
6SQA	- Open Reflector
	HAZPF - Matte Haze Alzak
	CRG - Clear Corrugated Texture

For white painted flange, drop "PF" from Catalog #.  
For other finishes, consult reflector section.

## Optional Accessories

Hanger Bars (set of 2)

- 101782 = #520 Caddy Bars
- 9152 = 52" C-Channel
- 9127 = 27" C-Channel
- 27BH = 27" Solid Bar
- 24CBH = 24" one-piece B-Line C-Channel hanger bar

Fixture:	Type:
Project:	

## Options

- 277 = 277V/ 120V Auto Transformer
- F = Fuse and Fuse Holder

All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice. Alzak® is a registered trademark of Alcoa.

**PATHWAY**  
the Lighting Source

Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591  
voice 800.342.0592 • fax 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

Series 6SQAAR111 - Square Aperture Adjustable AR111 Accent Downlight

SQ17.0  
CLMLUM